

NEWS & VIEWS

Open Access

Polarization-controlled optical holography using flat optics

Arka Majumdar¹ and Shane Colburn¹

Abstract

Due to the large number of degrees of freedom offered by nanoscale scatterers, a single flat optic can project different images at different distances depending on the polarization of the light, opening up opportunities for optical encryption and augmented reality systems.

It has long been known that images can be stored, compressed, and encrypted using optical holography¹; however, most of these existing optical devices are bulky, and their information storage capability is often limited. With the advent of metasurfaces, it is now possible to create ultracompact optical elements using only a single surface with a near-wavelength thickness². Metasurfaces are made of nanoscale scatterers, each of which can be designed to independently control the phase, amplitude, polarization, and spectrum of incident light. By precise engineering of these scatterers, it is possible to perform different functionalities with a single device, including wavelength-, angle-, and polarization-multiplexed holography. Almost all existing metasurface holograms, however, primarily rely on phase modulation.

The functionality of metasurfaces can be significantly improved if both the amplitude and phase can be manipulated together, and it was recently shown that such capability can provide high spatial-resolution metasurface holograms³. In that paper, the scatterers provide phase modulation via their orientation based on the geometric phase (commonly known as the Pancharatnam–Berry phase), whereas the amplitude is modulated via the size and shape of the scatterers. Such an approach could require more stringent fabrication tolerances owing to the reduced feature size. In a recent publication, Deng and coworkers developed a

new way to modulate the amplitude and phase of incident light using only the orientation of the scatterers⁴. They employed a simple law of polarization, known as Malus' law: if linearly polarized light passes through a polarizer, and the angle between the polarization axes is θ , the output intensity is $\sim \cos^2\theta$. Combining this with Pancharatnam–Berry phase, scatterers can be designed to independently control the phase and amplitude just by changing the orientation angle of the scatterers while keeping the size fixed. The fixed size of the scatterers can potentially make the fabrication process simpler.

Exploiting this independent control of the amplitude and phase, the authors demonstrated metasurfaces that can encode one image in the near field (information coded in the amplitude), whereas a different image can be projected in the far field (information coded in the phase) (Fig. 1). By controlling the input polarization of the light as well as the polarization orientation of the collected light, an image can be completely hidden in the far field. Such encoding of information in the polarization of light using an ultrathin metasurface can be used in many applications, including in encryption and augmented reality. For example, using polarization multiplexing, different information can be displayed in an augmented reality device in the near and far fields. In addition to providing potential applications, this work also helps us to answer a fundamental question about the information capacity of a metasurface when every degree of freedom of light is exploited.


Correspondence: Arka Majumdar (arka@uw.edu)

¹Electrical and Computer Engineering, University of Washington, Seattle, WA 98195, USA

© The Author(s) 2020



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

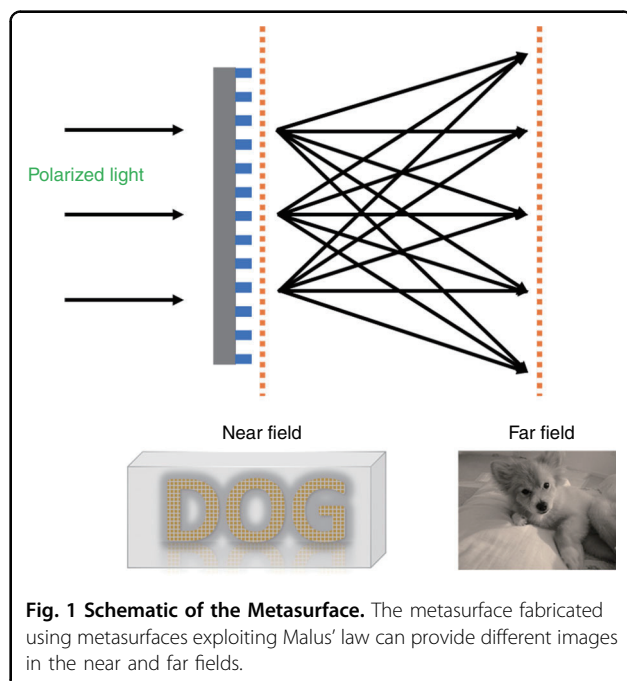

While this work primarily focuses on polarization multiplexing, the measurements still rely on multiple macroscopic optics. Cascading multiple metasurfaces could potentially reduce the overall volume of the optical system^{5,6}. Finally, the metasurfaces in this work are

determined via a conventional, intuition-driven design process that may be limited when exploiting multiple degrees of freedom and multiple polarization channels. Recently, reported inverse design methods^{7,8}, where optimization algorithms help realize a specified functionality, could potentially circumvent such challenges.

Conflict of interest

The authors declare that they have no conflict of interest.

Published online: 29 July 2020

References

1. Alfarou, A. & Brosseau, C. Optical image compression and encryption methods. *Adv. Opt. Photonics* **1**, 589–636 (2009).
2. Kamali, S. M. et al. A review of dielectric optical metasurfaces for wavefront control. *Nanophotonics* **7**, 1041–1068 (2018).
3. Overvig, A. C. et al. Dielectric metasurfaces for complete and independent control of the optical amplitude and phase. *Light: Sci. Appl.* **8**, 92 (2019).
4. Deng, L. G. et al. Malus-metasurface-assisted polarization multiplexing. *Light: Sci. Appl.* **9**, 101 (2020).
5. Zhou, Y. et al. Flat optics for image differentiation. *Nat. Photonics* **14**, 316–323 (2020).
6. Arbabi, A. et al. Miniature optical planar camera based on a wide-angle metasurface doublet corrected for monochromatic aberrations. *Nat. Commun.* **7**, 13682 (2016).
7. Bayati, E. et al. Inverse designed metalenses with extended depth of focus. *ACS Photonics* **7**, 873–878 (2020).
8. Phan, T. et al. High-efficiency, large-area, topology-optimized metasurfaces. *Light: Sci. Appl.* **8**, 48 (2019).